


NOTE: CONTRACTOR AND/OR UTILITY COMPANY SHALL SAW OR CUT EXISTING STREET SURFACE A MINIMUM DISTANCE OF 12 INCHES WIDER THAN THE EXCAVATED TRENCH OR DITCH WALL IN ORDER TO KEY THE FINAL REPLACEMENT SURFACE

NOTE: CONTRACTOR IS RESPONSIBLE FOR PROPERLY MARKING AND COVERING THE OPEN TRENCH WITH LIGHTED BARRICADES AND/OR METAL PLATES. STREET MUST BE LEFT OPEN TO TRAFFIC AS MUCH AS POSSIBLE. FLAG MEN WILL BE REQUIRED ON ANY STREET WHERE THERE IS A LANE CLOSURE.

NOTE: CONTRACTOR MUST USE "ASPHALT TACT" OIL BEFORE PAVING THE DISTURBED AREA.

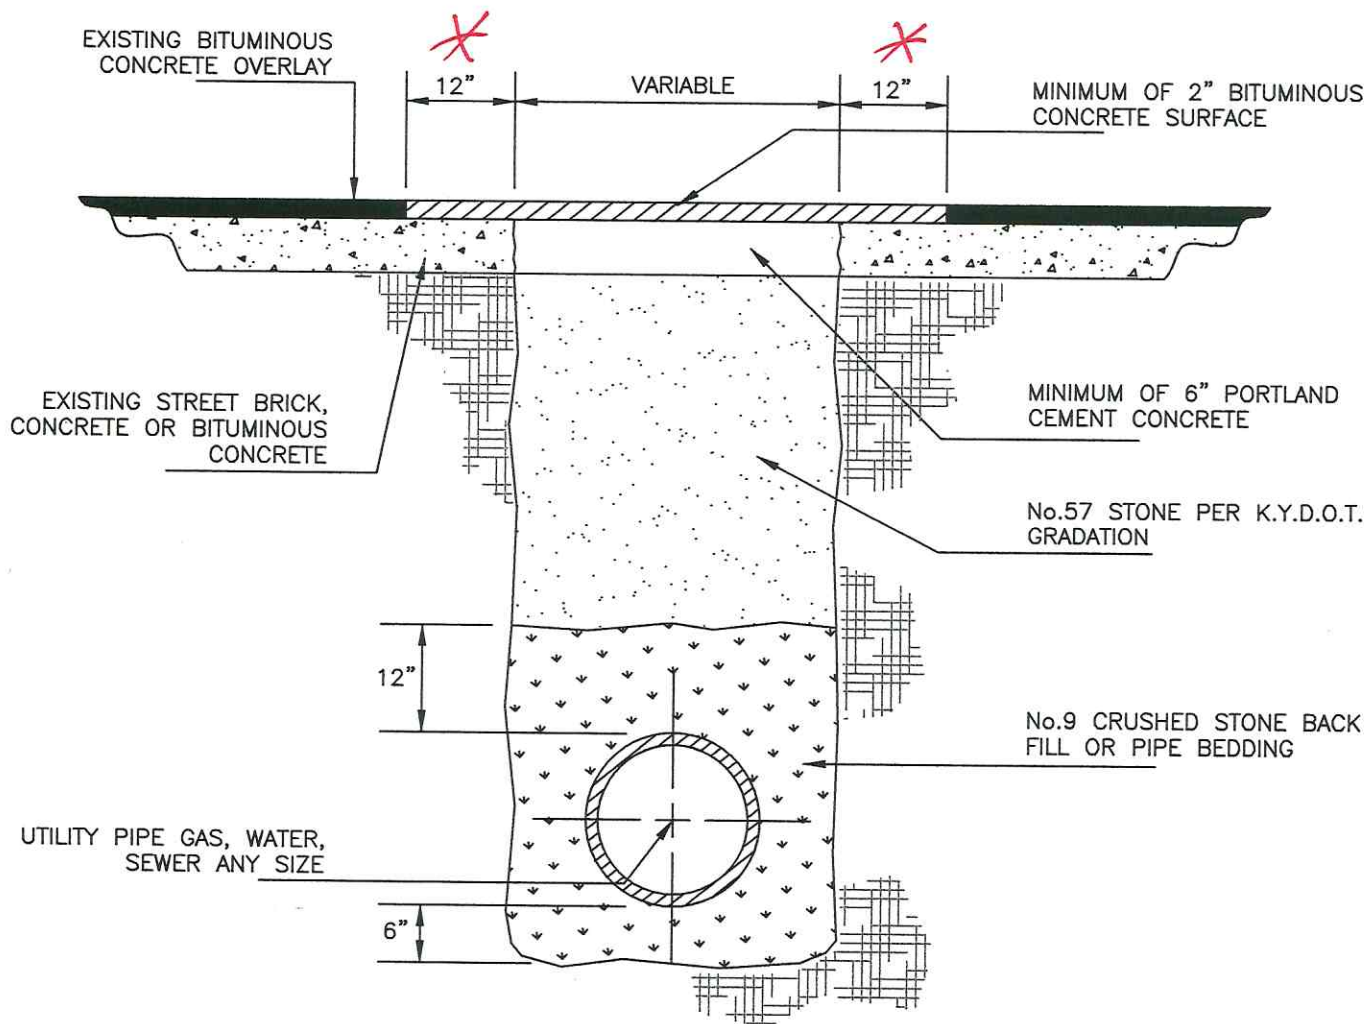

DATE: OCTOBER 17, 2003
NO SCALE

**CITY OF MT. STERLING, KY.
STANDARD DRAWING
UTILITY LINES
TRENCHING STREETS, PLACING BACK FILL,
AND REPLACEMENT OF PAVING**